


1952 DELLOW MK II

THE MARK II

Dellow



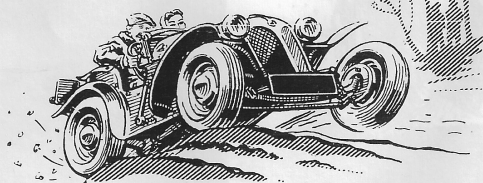


BRITAIN'S

**FINEST LIGHT CAR
FOR THE SPORTSMAN**

PRODUCED AT ALVECHURCH ENGLAND

PERFORMANCE • PERSONALITY • PERFECTION

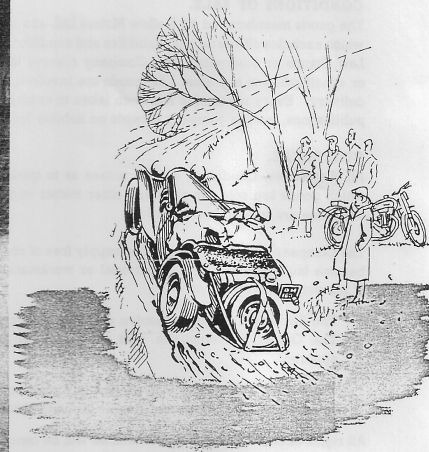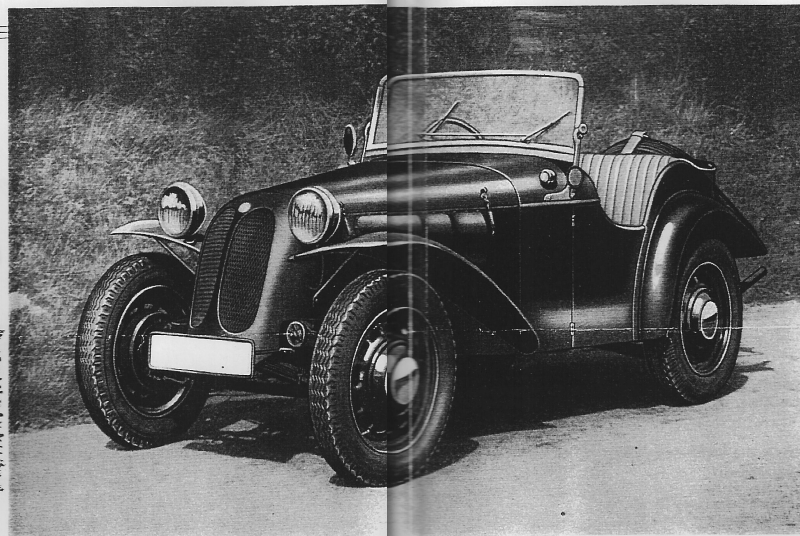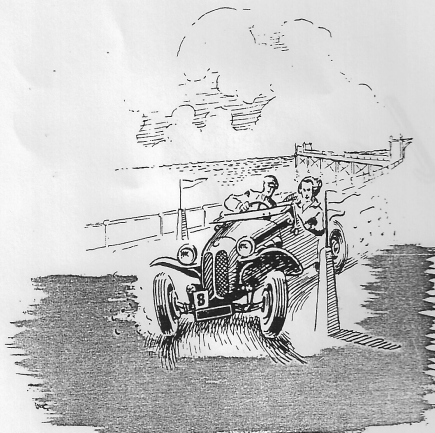

CHASSIS

Of patent construction in large diameter steel tubes of great strength and rigidity.

ENGINE

Bore 63.5 m./m. Stroke 92.5 m./m. Capacity 1172 c.c. developing 30.01 B.H.P. at 4000 r.p.m. when normally aspirated. Compression ratio 8.16 to 1. Cooling system comprises large capacity pressurised radiator, with water pump. Petrol feed by mechanical pump.

TRANSMISSION

Three forward gears and reverse. Synchromesh on top and second gears.

Ratios:—

First 3.07 to 1. Second 1.77 to 1. Top 1.00 to 1. Reverse 4.01 to 1.

Remote control gear change centrally positioned.

Drive shaft enclosed in torque tube, final drive by spiral bevel, axle ratio 5.5 to 1. Alternative ratio 4.72 to 1 available as optional extra.

SUSPENSION

Transverse front spring with adjustable Andre Hartford friction shock absorbers. Helical rear springs with Girling Telescopic Dampers.

BRAKES

Girling mechanical throughout. Foot and parking brakes operate on all four wheels. Outside hand brake available on models without doors.

WHEELS

Five stud easy clean pressed wheels with large plated hub caps. Fitted with 550 x 16 large section tyres on rear and 450 x 17 or 500 x 16 on front. One spare at rear.

Specification

BODY

Two seater two door construction in lightweight steel tubing welded integrally with chassis for maximum rigidity.

Aluminium alloy panelling, large capacity rear mounted petrol tank. Fold flat windscreen. Upholstered in 'Vynide' and 'Dunlopillow'. Weather equipment includes hood and tonneau cover. In any single colour as selected. Duotones charged extra.

ELECTRICAL

6 V. system, coil ignition. Chromium plated lamps and fittings. Twin windscreen wipers. Rear mounted large capacity battery, illuminated instrument panel.

DIMENSIONS

Overall length 130", width 53", height 52½", height with screen flat 45", wheel base 84", Track front 46½", rear 48". Turning circle 28' 6". Unladen weight (dry) 11½ cwt. Fuel tank capacity 15 gallons.

GENERAL

Provision is made for the installation of supercharging equipment and for carrying a second spare wheel. In supercharged road trim 0.50 m.p.h., through the gears, is reached in 12.6 seconds. Standing quarter mile in 22.8 seconds. 38 B.H.P. at 4500 r.p.m. developed with a low boost of 4 lbs. per square inch. Fuel consumption in standard trim 40 M.P.G.

Top speed (standard) 70 M.P.H. Top speed (supercharged) 85 M.P.H.

The overall weight distribution has been specially designed to give maximum traction and road holding over difficult terrain, and the car is therefore eminently suitable for touring and competition.

A CAR WHICH IS BUILT FOR A JOB —and does it!

CONDITIONS OF SALE.

The goods manufactured by Dellow Motors Ltd. are supplied with an express warranty which excludes all warranties, liabilities and conditions whatsoever implied by Common Law, Statute or otherwise. The Company reserve the right to vary the list price and or specification at any time. All goods are invoiced at the prices ruling at the date of delivery. Every precaution has been taken to ensure accuracy of details appearing in publications, but the company accepts no liability for errors or omissions.

GUARANTEE.

All Warranties, Conditions or Guarantees as to quality or fitness for the purpose for which goods are sold, or as to any other matter implied by Common Law, Statute or otherwise are in all cases excluded.

The Company guarantee to repair or supply free of charge any part or parts which may become faulty due to defective material or workmanship within six months from date of purchase provided that :—

The Car is still in the possession of the original purchaser.

The Owner communicates with the Company immediately the fault becomes apparent.

The Owner sends the car or alleged faulty part or parts to the Company carriage paid stating the Chassis and Engine No. and date of purchase.

All rights or liability under this Guarantee will be cancelled if the Car is used for racing or competition work without the Company's consent in writing.

The Company's guarantee does not include propriety articles manufactured by other firms, but such warranty as these manufacturers' issue is transferred to the customer.

The Company's liability is confined to the free replacement of the agreed defective material.

It does not include the removal of the faulty parts and the fitting of such new material as the Company may agree to supply.

SUCCESSES IN RELIABILITY TRIALS, RALLIES, Etc.

INCLUDE 40 PREMIER TROPHIES AND

OVER 400 OTHER AWARDS.

Dellow Motors Limited

ALVECHURCH

NR. BIRMINGHAM

TEL. HILLSIDE 1879